

# Data sheet

## Laboratory Refrigerator CHL 5 Smart



The photo above is for reference only, may show additional options not included in standard equipment.  
The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

### Advantages of the SMART controller:

- 4,3", clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on


#### TECHNICAL DATA

air convection	forced
chamber capacity [l]	300
working capacity [l]	243
controller	microprocessor with external LCD graphic display
display	4,3" full colour touch screen

#### TEMPERATURE

temperature range [°C]	0...+15
temperature resolution every ... [°C]	0,1
over temperature protection	class 1.0 to DIN 12880 / class 3.2 (option) / class 3.2 in Smart PRO

CHAMBER	
door type	solid / glass or double (option) /1/
<b>Interior</b>	
B Smart	aluminium
C Smart	stainless steel to DIN 1.4016
CS Smart	stainless steel to DIN 1.4016
P Smart	acid-proof stainless steel to DIN 1.4301
PS Smart	acid-proof stainless steel to DIN 1.4301
<b>housing</b>	
B Smart	powder coated sheet
C Smart	powder coated sheet
CS Smart	stainless steel polished
P Smart	powder coated sheet
PS Smart	stainless steel polished
<b>overall dims [mm] /2/</b>	
width A	620
height B	1500
depth C	650
<b>internal dims [mm] /3/</b>	
width D	480
width D'	520
height E	1260
depth F	420
depth F'	480
depth G	320
height H	1040
height I	-

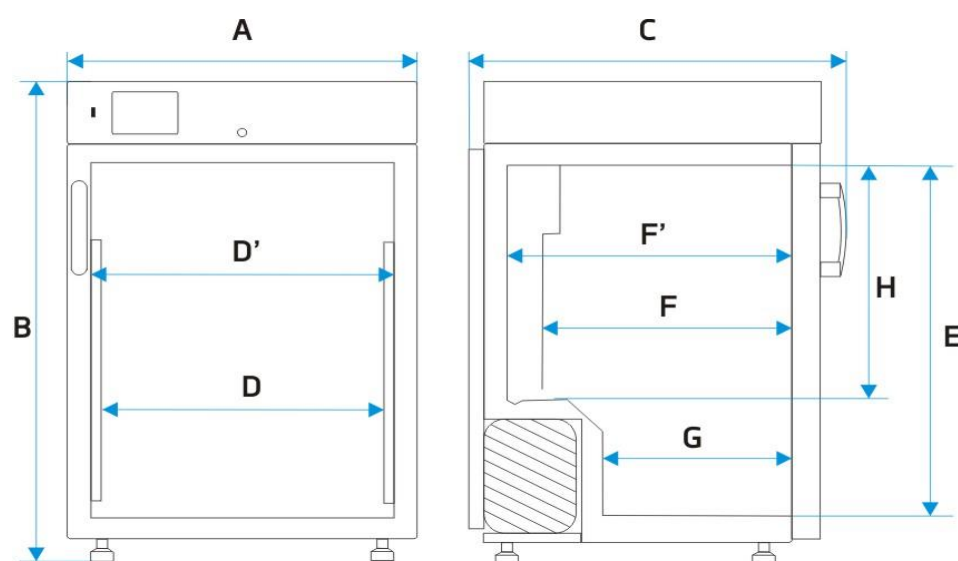

shelves (standard / max)	4 // 7
max shelf workload [kg] /4/	10
- reinforced shelf version (PW) /5/	-
max unit workload [kg]	60
- reinforced unit version (W) /6/	-
weight [kg]	75

## ELECTRICAL PARAMETERS

voltage*	230V 50Hz
nominal power [W]	350
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

\* - 230V 60Hz, 115V 60Hz also available

1 - additional internal glass door

2 - depth doesn't include 50 mm of power cable


3 - dims of units with double door can be smaller

4 - on uniformly loaded surface

5 - reinforced shelf


6 - reinforced version

## OPTIONS AND ACCESSORIES



Order number: \*/C

Internal glass door



Order number: \*/A

External glass door



Order number: \*/P

Wire shelf



Order number: \*/P INOX

Stainless steel wire shelf




Order number: \*/PP

Perforated shelf



Order number: \*/PW

Reinforced shelf




Order number: KUW GN\*/\*

Stainless steel cuvettes



Order number: ST/CHL/SWP ALU

Aluminum drawer with powder coated slides



number: ST/CHL/SWP INOX

Stainless steel drawer with powder coated slides



Order number: ST/CHL/SWPN INOX

Stainless steel drawer with stainless steel slides



Order number: ORG-FARM

Pharma organizer










Order number: QLK\*

Wheels



Order number: \*PLUS

Automatic defrosting function

	Order number: ST/CHL WENT	Fan speed control
	Order number: LOD	Door opening counter
	Order number: GNZ	Internal socket
	Order number: OCZ/N	Non-standard access port for external sensor
	Order number: LabDesk	LabDesk - software
	Order number: BRT/*/L or IQ/OQ/PQ	Calibration and IQ, OQ, PQ qualification
	Order number: */3.2	Over temperature protection 3.2 class according to DIN 12880