



Data sheet

Safety shower test unit KPB



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Laboratory safety showers should be tested once a month to check the functionality and the requested water flow rate of 60 l/min in an emergency case. This mobile test unit provides a very convenient and easy solution to test your body safety showers and handheld eye showers.

- Transparent PVC water reservoir on castors, 110 litre capacity
- Built-in suction pump (230 V) and IP 45 protected power switch
- Drain hose (2 m) to empty the water reservoir
- Separate mounts for drain hose and power cord

Centrally placed under the body safety shower the big funnel can be extended to a height of 2,30 metres, while the smaller funnel is designed to collect the water from handheld eye showers (min. flow rate: 6 l/min). The collected water amount can be read on the water reservoir scale from 0 to 110 litres. The built-in electrical suction pump will empty the reservoir in a very short time.



POL-EKO
Perfect Environment


(+48) 32 453 91 70
info@pol-eko.com.pl
www.pol-eko.com.pl

POL-EKO A. Polok-Kowalska sp.k.
44-300 Wodzisław Śląski
ul. Kokoszycka 172 C

TECHNICAL DATA

overall dims [mm]

width A	600
height B	1845
depth C	490
depth F	470
height E	1125
width D	860
weight [kg]	40

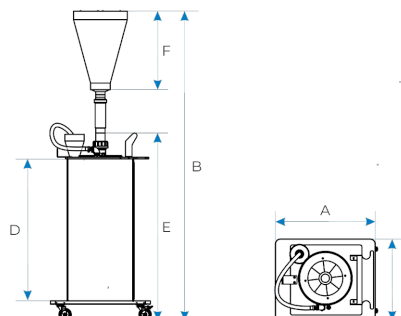

BASIC PARAMETERS

reservoir capacity [l]	110
water reservoir material	transparent PCV
power switch protection	IP 45
drain hose lenght [m]	2
diameter of big funnel [mm]	323
diameter of small funnel [mm]	116
max height of large funnel [mm]	2 300

ELECTRICAL PARAMETERS

voltage**	230 V 50 Hz
warranty	24 months
manufacturer	POL-EKO