



## Data sheet

print date: 2024-11-03


## Drying Oven SLN 180 Smart



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

### Advantages of the SMART controller:

- 4,3", clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on

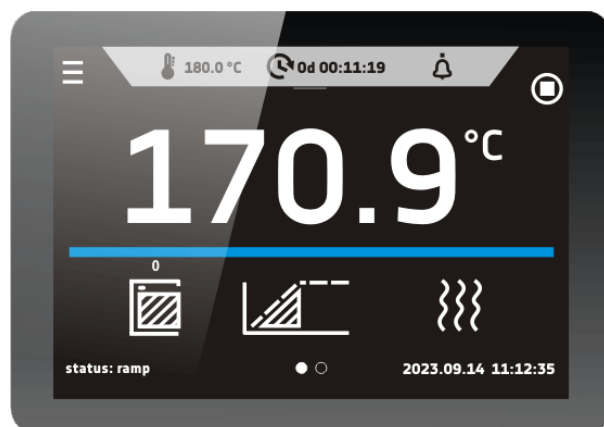

Smart - preview screen




|  |   |
|--|---|
| 1  | 69  |
| type                                     | SLN 180 Smart                               |
| <b>TECHNICAL DATA</b>                    |   |
| air convection                           | natural                                     |
| chamber capacity [l]                     | 180   |
| working capacity [l]                     | 180   |
| controller                               | microprocessor PID                          |
| display                                  | 4,3" full colour touch screen               |
| <b>TEMPERATURE</b>                       |   |
| temperature range [°C]                   | 5°C above ambient temperature ... +300°C    |
| temperature resolution every ... [°C]    | 0,1   |
| temperature fluctuation at 105°C [+/°C]* | 0,4   |
| temperature variation at 105°C [+/°C]*   | 2,3   |
| temperature protection                   | class 2.0 to DIN 12880 / class 3.1 (option) |
| <b>CHAMBER</b>                           |   |
| door type                                | solid / door with viewing window (option)   |
| <b>interior</b>                          |   |
| Smart                                    | acid-proof stainless steel to DIN 1.4301    |
| IG Smart                                 | acid-proof stainless steel to DIN 1.4301    |
| <b>housing</b>                           |   |
| Smart                                    | powder coated sheet                         |
| IG Smart                                 | stainless steel linen finish                |

**overall dims [mm] /l/**

|          |      |
|----------|------|
| width A  | 660  |
| height B | 1040 |
| depth C  | 820  |

**internal dims [mm]**

|          |     |
|----------|-----|
| width D  | 460 |
| height E | 720 |
| depth F  | 550 |

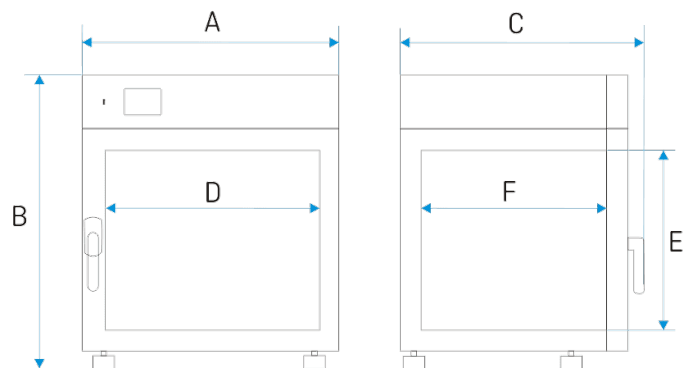


|  |       |
|--|-------|
| shelves (standard   max)                 | 3   9 |
| max shelf workload [kg] /2/              | 25    |
| - reinforced shelf version (PW) [kg] /3/ | 50    |
| max unit workload [kg]                   | 75    |
| - reinforced unit version (W) [kg] /4/   | 120   |
| weight [kg]                              | 88    |

**ELECTRICAL PARAMETERS**

|   |  |
|---|--|
| voltage   | 230V 50-60Hz   |
| nominal power [W]   | 2500   |
| warranty  | 24 months  |
| manufacturer  | POL-EKO®   |
| txt_opis_pt   | all the above technical data refer to standard units (without optional accessories)<br>* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:<br>$K = \pm (T \text{ average max.} - T \text{ average min.}) / 2$<br>** - other power supplies on request<br>1 - depth doesn't include 50 mm of power cable<br>2 - on uniformly loaded surface<br>3 - reinforced shelf<br>4 - reinforced version |
| PL typ urządzenia   | Drying Oven  |
| img_photo   | SLN-180-Smart  |
| The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo. | The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.  |
| nazwa www pl  | Suszarka Laboratoryjna SLN 180 Smart   |
| nazwa www EN  | Drying Oven SLN 180 Smart  |
| nazwa www ES  | Estufa de Secado SLN 180 Smart   |
| ekran_grafika   | sln_smart  |
|   | Suszarki Laboratoryjne   |
| 0   | 1  |

all the above technical data refer to standard units (without optional accessories)  
 \* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:  
 $K = \pm (T \text{ average max.} - T \text{ average min.}) / 2$   
 \*\* - other power supplies on request  
 1 - depth doesn't include 50 mm of power cable  
 2 - on uniformly loaded surface  
 3 - reinforced shelf  
 4 - reinforced version

**OPTIONS AND ACCESSORIES**


Order number: \*/A

door with viewing window




Order number: \*/P INOX

Stainless steel wire shelf INOX



Order number: \*/PP

Perforated shelf



Order number: \*/PW

Reinforced shelf



Order number: KUW GN\*\*

Stainless steel cuvettes



|  |                                  |  |
|--|----------------------------------|--|
|  | Order number: QLK*               | Castors  |
|  | Order number: */S or */S INOX    | Table with castors   |
|  | Order number: */ST or */S INOX   | Base on castors  |
|  | Order number: */W                | Reinforced version   |
|  | Order number: OWW/OWW LED        | Interior lighting  |
|  | Order number: HEPA               | HEPA Clean Air Filter  |
|  | Order number LabDesk             | LabDesk software   |
|  | Order number: BRT*/L or IQ/OQ/PQ | Calibration and IQ, OQ, PQ qualification                     |
|  | Order number: */3.1              | Over temperature protection 3.1 class according to DIN 12880 |
|  | Order number: BPP 12             | Battery backup for display                                   |
|  | Order number: PORT ALARM         | Dry alarm contact  |
|  | Order number: LANK               | LAN cable  |
|  | Order number: OCZ/20             | Non-standard access port 20 mm                               |
|  | Order number: OCZ/30             | Additional access port 30 mm                                 |
|  | Order number: OCZ/60             | Non-standard access port 60 mm                               |
|  | Order number: OCZ/100            | Non-standard access port 100 mm                              |
|  | Order number: KD                 | Access control   |