



Data sheet

print date: 2026-06-15

Emergency power supply ZA II 12H



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Standard equipment

- converter with the function of charging the batteries
- battery/ies
- castors with brake
- visual and acoustic signal informing about the operating status
- electric socket type E (230V)
- user manual in English




TECHNICAL DATA

display	LED
housing	powder coated sheet

overall dims [mm]

width A	660
height B	590
depth C	1020
weight [kg]	235

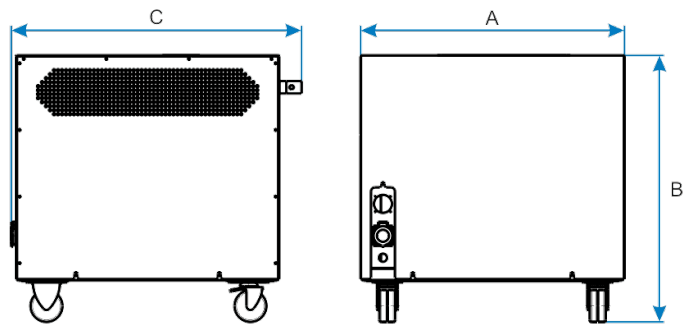

BASIC PARAMETERS

operating temperature [°C]	+10...+30
is compatible with the model	CHL/ST 500-1450, ILW 240-750
back-up time* [h]	12
number of batteries [pcs.]	3

ELECTRICAL PARAMETERS

voltage	230 V 50 Hz
nominal power [W]	3 000
warranty	12 months
manufacturer	POL-EKO®

* the approximate time of maintaining the operation of the unit with the emergency power supply depends on the parameters of the environment, the degree of filling the chamber, etc.